


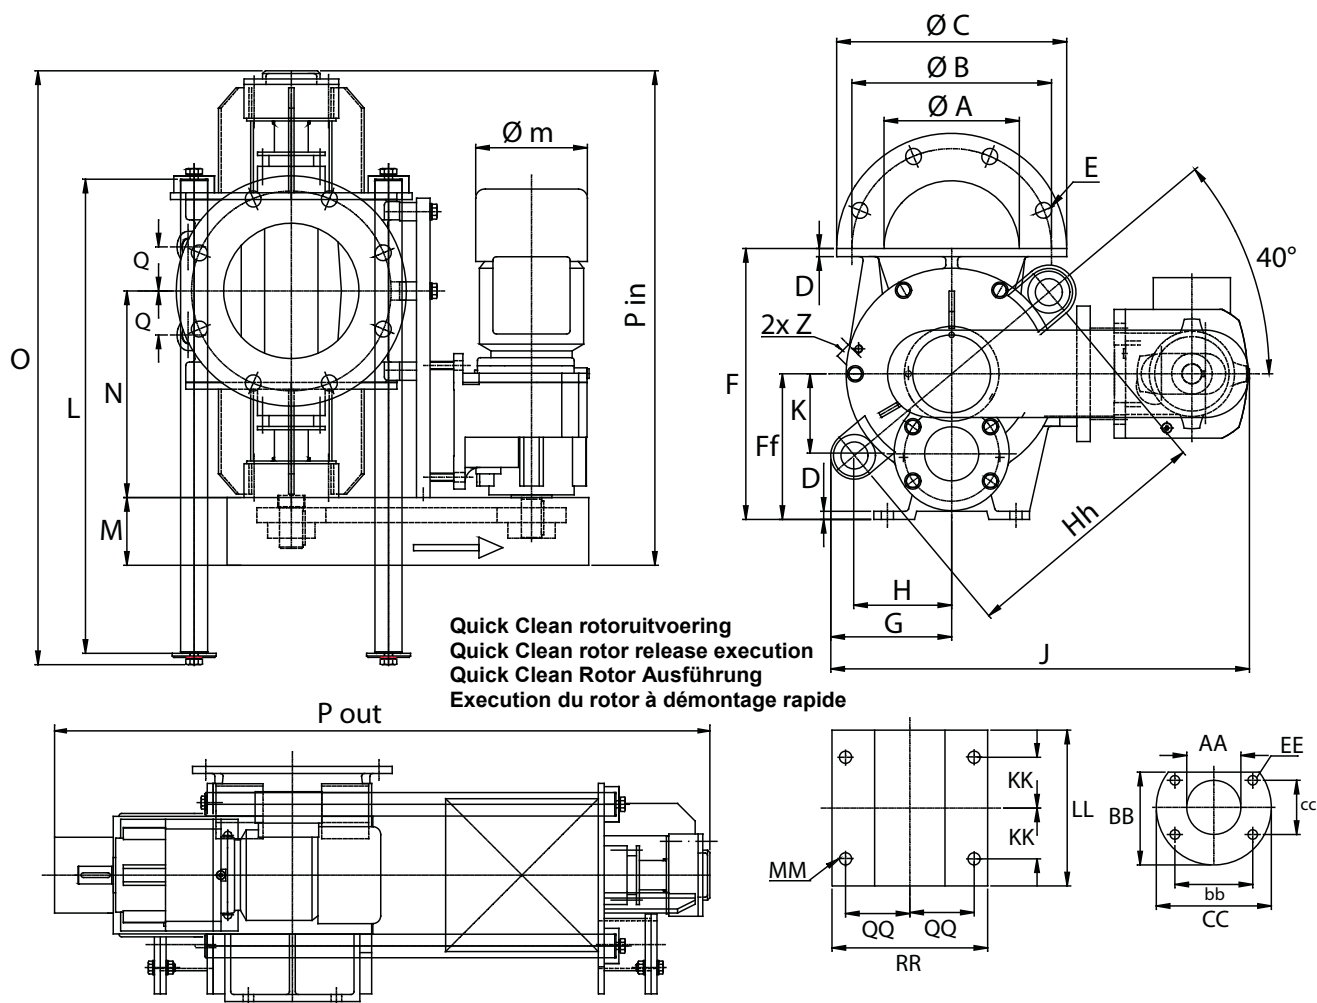

Type H-GRDG	A	B	C	D	E	F	FF	G	H	Hh	J	K	L	M	m	N	O	Q	P in P out
175	175	270	315	12	8x Ø23	335	175	144	115	300		96	575	100	145			55	
200	200	295	340	12	8x Ø23	400	215	180	145	375	620	121	700	100	165	305	877	65	
250	250	350	395	14	12x Ø23	465	250	203	167	435		140	800	100	165			75	730/1116
300	300	400	445	16	12x Ø23	555	295	257	200	520	812	167		100	185			95	

Type H-GRDG	Ltr / rev	kW	Nm	AA	BB	bb	CC	cc	EE	KK	LL	MM	QQ	RR	Y*	Z*	kg
175	5,5	0.37	131	65	104	60	150	118	4x Ø12	65	190	4x Ø12	85	200	1/4"	1/2"	
200	10,5	0.55	286	80	115	80	170	137	4x Ø14	75	230	4x Ø18	95	230	1/4"	3/4"	
250	19,0	0.75	286	100	139	98	200	163	4x Ø14	100	274	4x Ø18	120	275	1/4"	3/4"	
300	34,0	1,5	478	125	164	115	230	189,5	4x Ø14	135	350	4x Ø22	125	320	1/4"	1"	

IP 55 / ISO F: Beschermings/Isolatie klasse - Protection/Insulation class - Schutzart/Isolationsklasse - Protection/Isolation
230/400V-50Hz: Netspanning – Electrical supply – Betriebsspannung - Caractéristiques électriques

PN10: Standaard flensboorpatroon – Standard drilling pattern - Standard Flanschanschluss- Plan de perçage standard
 Afwijkende boorpatronen op aanvraag - Alternative flange drilling patterns on request
 Andere Flanschanschlussmaße auf anfrage - Types spéciaux d'alésage de bride sur demande

*Note Y: Standaard afgeplugd – Standard plugged - Standard Endverschluss– Bouchon a colerette std

*Note Z: Standaard geboord - Standard drilled - Standard geborht - Standard percé

Ref.drawing:
17911-001-01