


S-AX\*


- \* met standaard stalen rotorbladen
- \* with standard steel rotor blades
- \* mit serienmäßigen Rotorblättern aus Stahl
- \* avec des pales de rotor standard en fonte

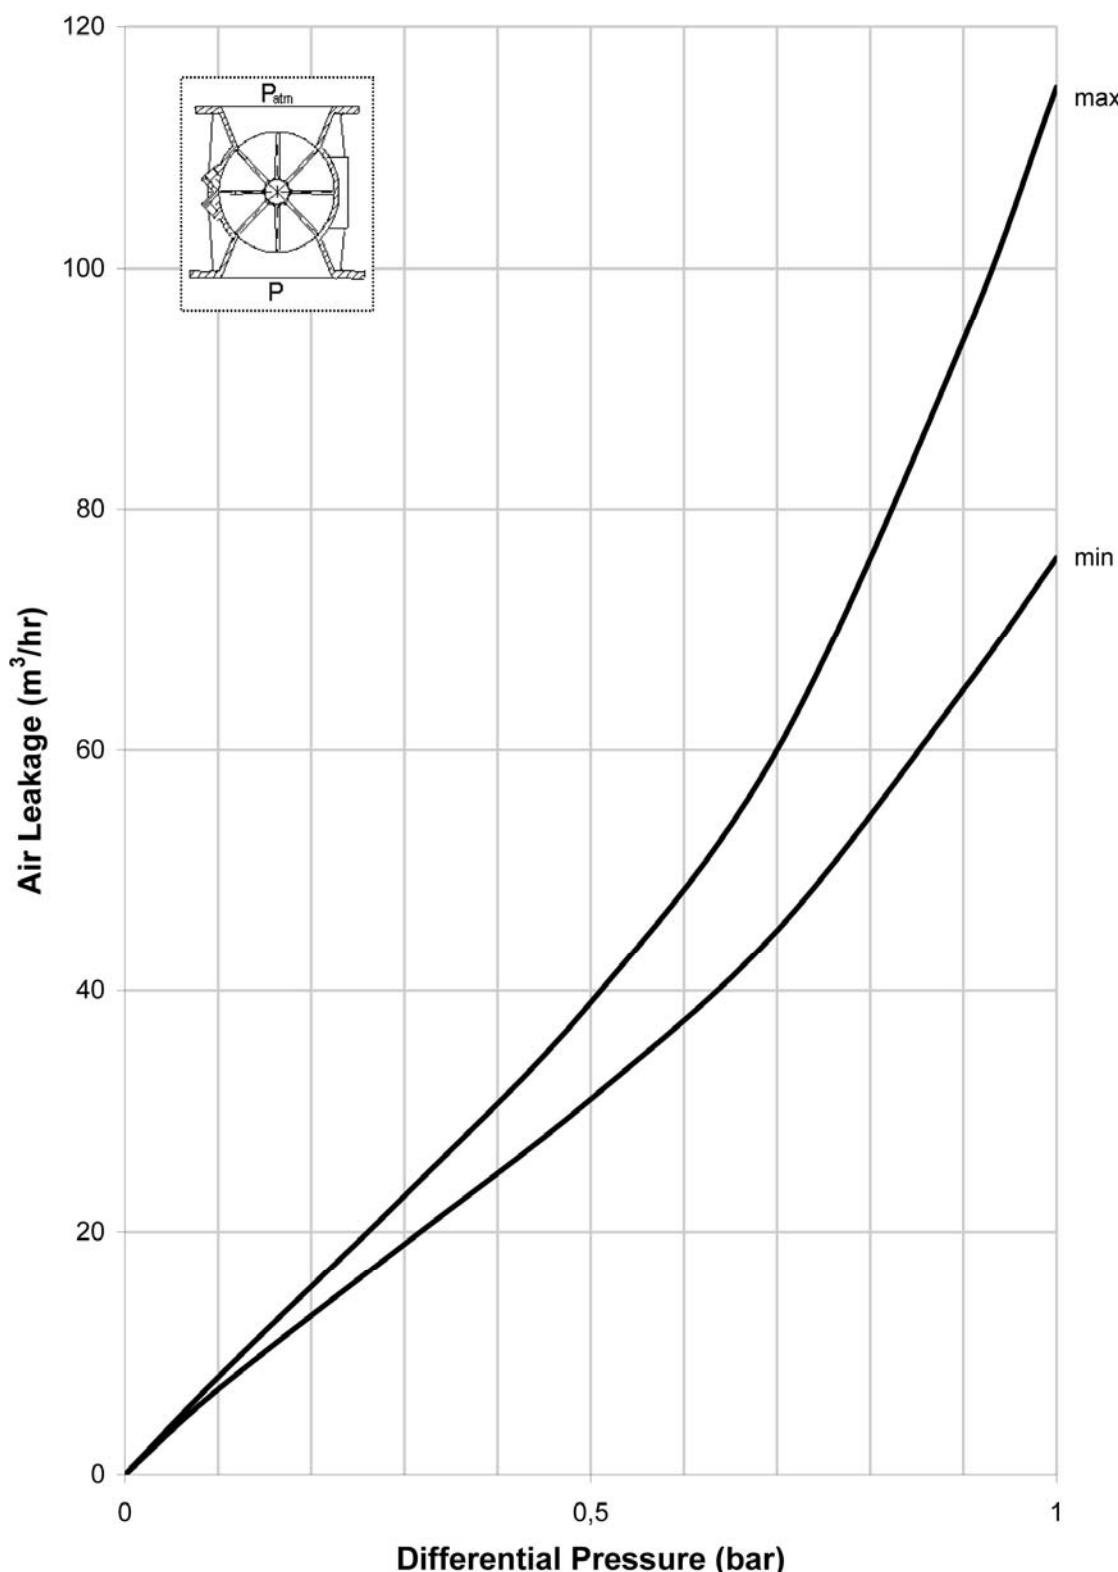

Air leakage indicated is the maximum and minimum value found during testing.  
The air leakage is indicated in standard  $m^3/hr$  ( $P=P_{atm}$ ,  $T=20^\circ C$ ).

S-AX\*

- \* met standaard stalen rotorbladen
- \* with standard steel rotor blades
- \* mit serienmäßigen Rotorblättern aus Stahl
- \* avec des pales de rotor standard en fonte

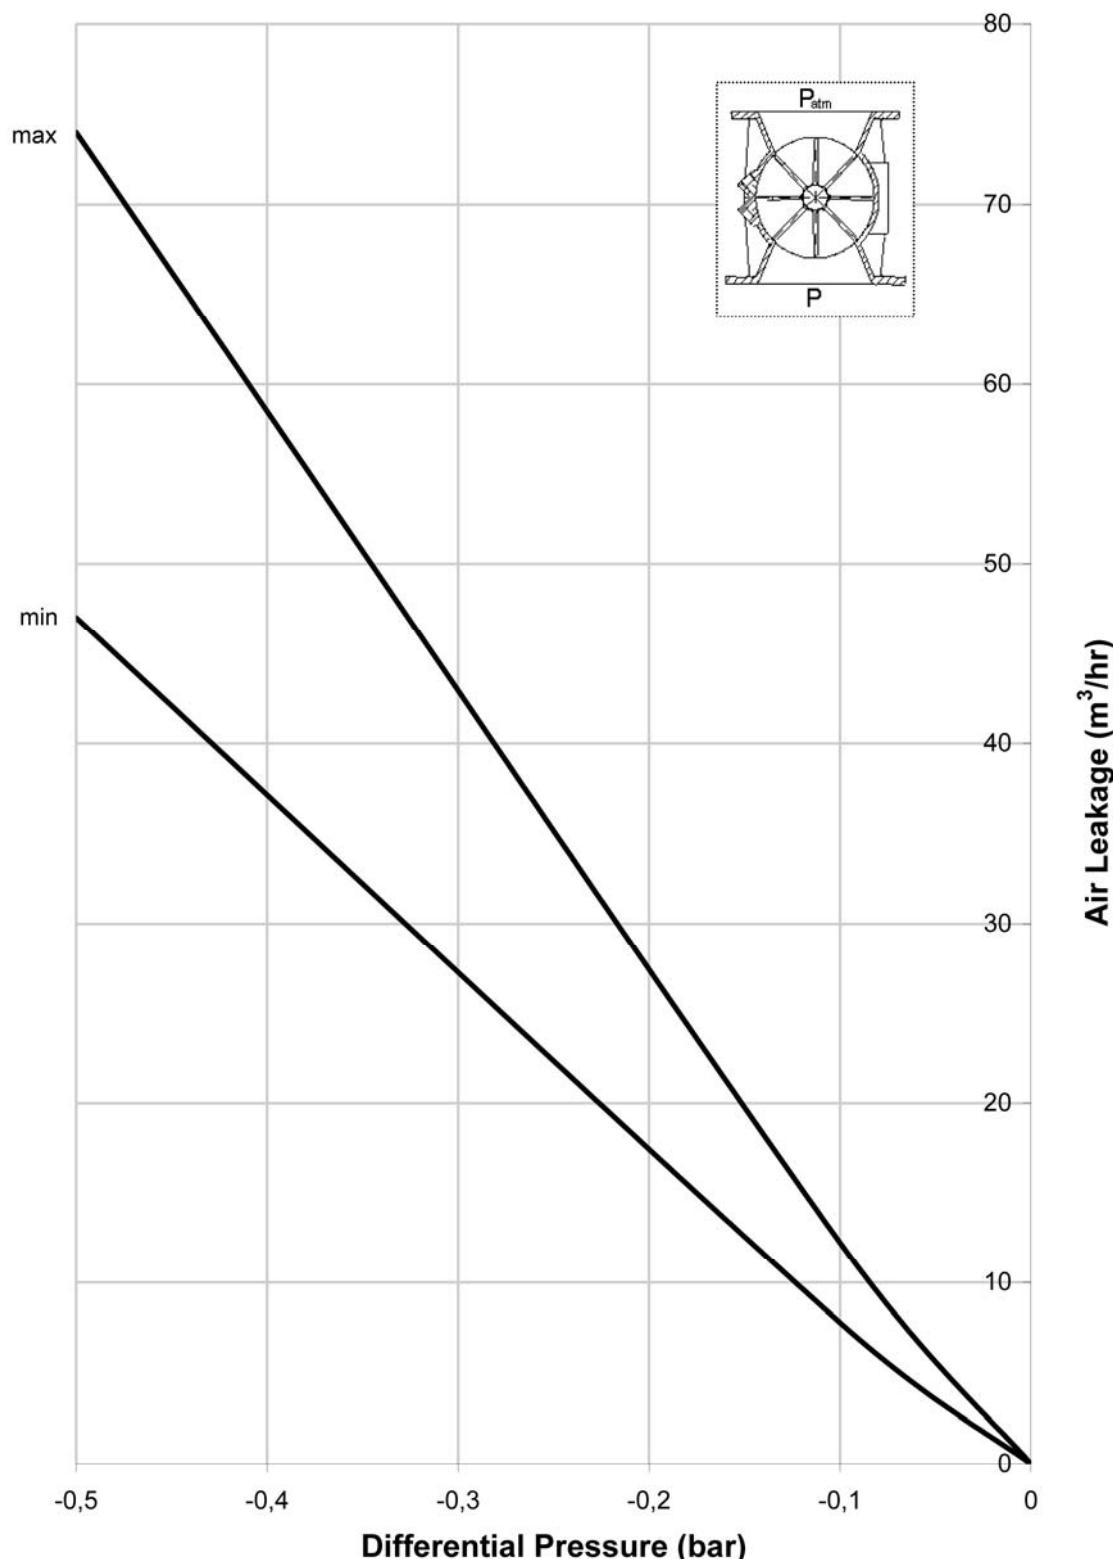

Air leakage indicated is the maximum and minimum value found during testing.  
The air leakage is indicated in standard  $\text{m}^3/\text{hr}$  ( $P=P_{\text{atm}}$ ,  $T=20^\circ\text{C}$ ).